

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 August 2005 (18.08.2005)

PCT

(10) International Publication Number
WO 2005/075147 A1

(51) International Patent Classification⁷: **B24B 23/00**

(21) International Application Number:
PCT/IB2005/000242

(22) International Filing Date: 1 February 2005 (01.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/541,218 2 February 2004 (02.02.2004) US
60/545,058 17 February 2004 (17.02.2004) US
60/560,293 7 April 2004 (07.04.2004) US

GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and


(72) Inventor: MARTON, Miksa [CA/CA]; 2495 Santo, Windsor, Ontario N9G 2J7 (CA).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SANDING APPARATUS

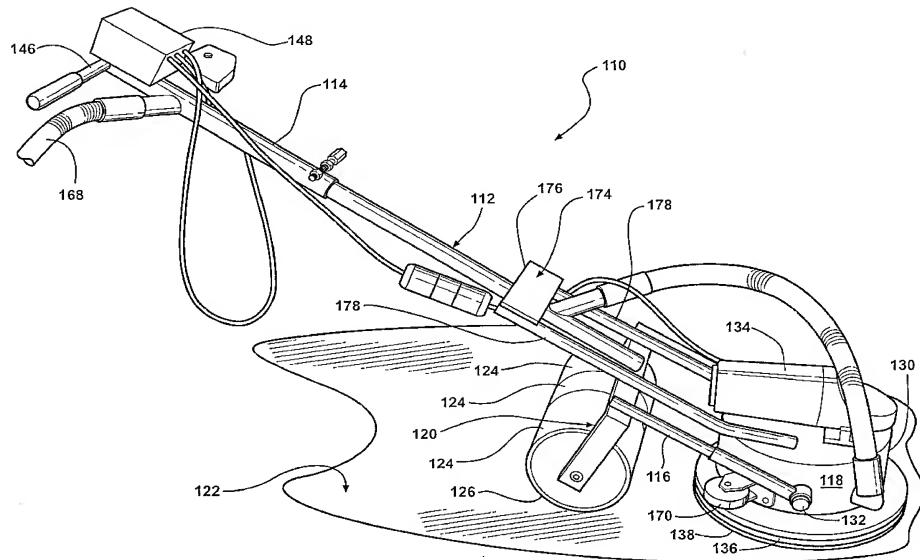

(57) Abstract: A sanding apparatus for sanding a support surface includes an elongated frame having a handle end and a work end. The handle end is arranged for operator control and the work end is adapted for connection to a working device. The sanding apparatus also includes a stabilizer member adapted to contact and grip the support surface. The stabilizer member is disposed between the handle end and the work end. The stabilizer member prevents the sanding apparatus from pulling away from an operator during use.

WO 2005/075147 A1